

Application Note

AEROFLEX
A passion for performance.


Eurocom data interfaces in the 2850 series



Eurocom is a data communications standard in common use within NATO armed forces. It is framed to allow channelization of compressed speech or low rate data, with provision for encryption if required. Speech compression is by delta coding with syllabic companding giving channel rates of 16 or 32 kbit/s.

Data channel rates are typically 2.4 or 9.6 kbit/s. There are three standard transmission bit rates of 256, 512 and 1024 kbit/s with three different interfaces over which the data can be transported. These are shown below. Some countries also use non-standard rates. 285X can provide all of these three interfaces, with IB5 and IB6 as options,

and Bit Error Rate Testing can be carried out. However, there is no provision for framed Eurocom, nor for encryption. Encryption can normally be turned off on the EUROCOM equipment for test purposes.

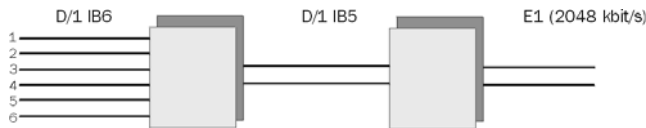

EUROCOM DATA INTERFACES

The main characteristics of the Eurocom data interfaces are as below.

D/1 IB6

This interface is 100% AMI with a signal amplitude 50% that of the standard 64 kbit/s codirectional signal, ie 0.5 V peak. The lines are:

- Line 1 - Data input
- Line 2 - Clock associated with Line 1
- Line 3 - Data output
- Line 4 - Clock associated with Line 3
- Line 5 - Alignment command for link encryption (optional)
- Line 6 - Crypto alignment (optional)

Data rates are 256, 512 and 1024 kbit/s, which are selectable on the 285X.

Other rates are possible from 32 to 2048 kbit/s in 1 Hz steps.

The interface is provided via the 15 way D-type used for the 64 kbit/s codirectional and contradirectional interface.

D/1 IB5

This interface is HDB3 with a signal amplitude of the standard 2048 kbit/s HDB3. The lines shown are Tx and Rx data, with clock being recovered from the data.

Data rates are 256, 512 and 1024 kbit/s, which are selectable on the 285X.

The interface is provided via the standard 2 Mbit/s BNC and CF connectors.

E1 (2048 kbit/s)

This interface is the standard 2048 kbit/s HDB3. The required data rates of 256, 512 and 1024 kbit/s are carried as nx64 kbit/s channels within the normal frame structure. This is standard within the 285X.

2850 Series Eurocom Options

- Option 22 - D/1 IB6.
- Option 25 - D/1 IB5 and D/1 IB6.
- Standard - E1 (2048 kbit/s).


Options 22 and 25 are available on all versions of the 2850 series for maximum flexibility of application.

2850 Series Eurocom Set up


D/1 IB6

Set Tx and Rx to:

MODE: DATA.
 System: EUROCOM.
 Clock: EUROCOM (or as required).
 Bit Rate: 256, 512 or 1024 kbit/s (other rates available).

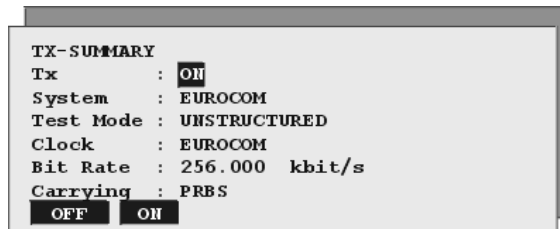

TX-DATA SUMMARY Page

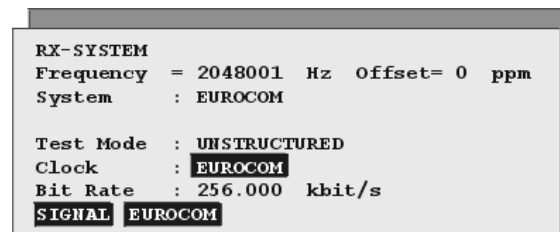


RX-DATA SYSTEM Page

Connect to system via 64 kbit/s 15 way D-type data connector (see data sheet for connector pinout).


D/1 IB5

Set Tx and Rx to:

MODE: PCM.
 System: 256, 512 or 1024 kbit/s (as required).

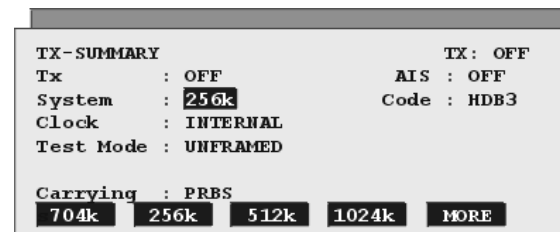

TX-PCM SUMMARY Page

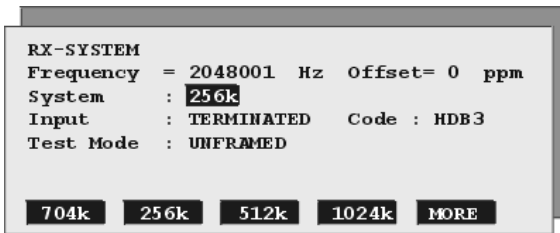


RX-PCM SYSTEM Page

Connect to system via BNC (75 Ω unbalanced) or CF (120 Ω balanced) connectors.


E1 (2048 kbit/s)

Set Tx and Rx to:


- MODE: PCM.
- System: 2M or 2M/noMF (as required).
- Test Mode: N x 64.
- Nx64 Channels: 1-4 for 256 kbit/s, 1-8 for 512 kbit/s or 1-16 for 1024 kbit/s as required.

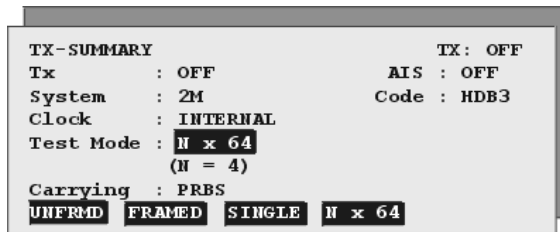

TX-PCM SUMMARY Page

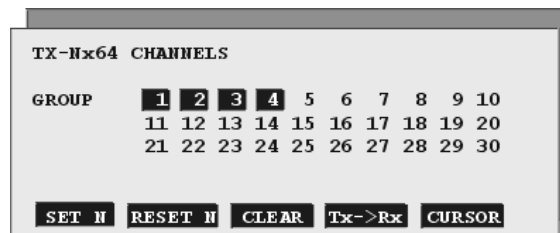

TX-NX64 CHANNELS Page

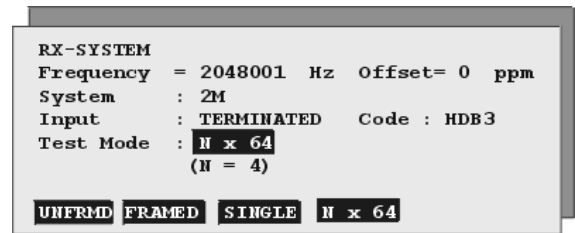

RX-PCM SYSTEM Page

Connect to system via BNC (75 Ω unbalanced) or CF (120 Ω balanced) connectors.

Error Performance Test

Run Bit Error Rate Test for error performance analysis of EURO-COM link, loopback or end-to-end using one or two instruments as appropriate.



End-to-End Error Performance Test



Loopback Error Performance Test

CHINA Beijing

Tel: [+86] (10) 6467 2716
Fax: [+86] (10) 6467 2821

CHINA Shanghai

Tel: [+86] (21) 6282 8001
Fax: [+86] (21) 62828 8002

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 8131 2926-0
Fax: [+49] 8131 2926-130

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 5115 4501
Fax: [+91] 80 5115 4502

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SPAIN

Tel: [+34] (91) 640 11 34
Fax: [+34] (91) 640 06 40

UK Burnham

Tel: [+44] (0) 1628 604455
Fax: [+44] (0) 1628 662017

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2005.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.